Similarity Search

The q-Gram Distance

Nikolaus Augsten
nikolaus.augsten@plus.ac.at
Department of Computer Science
University of Salzburg

database
research group

https://dbresearch.uni-salzburg.at

WS 2026/27

Version October 27, 2026

Outline

1. Filters for the Edit Distance
   - Motivation
   - Lower Bound Filters
   - Length Filter
   - q-Grams: Count Filter
   - q-Grams: Position Filtering
   - Experiments
2. The q-Gram Distance
3. Conclusion

Outline

1. Filters for the Edit Distance
   - Motivation
   - Lower Bound Filters
   - Length Filter
   - q-Grams: Count Filter
   - q-Grams: Position Filtering
   - Experiments
2. The q-Gram Distance
3. Conclusion

Outline

1. Filters for the Edit Distance
   - Motivation
   - Lower Bound Filters
   - Length Filter
   - q-Grams: Count Filter
   - q-Grams: Position Filtering
   - Experiments
2. The q-Gram Distance
3. Conclusion

Application Scenario

- Scenario:
  - A company offers a number of services on the Web.
  - You can subscribe for each service independently.
  - Each service has its own database (no unique key across databases).
- Example: customer tables of two different services:

A

ID	name	...
1023	Frodo Baggins	...
21	J. R. R. Tolkien	...
239	C.S. Lewis	...
863	Bilbo Baggins	...
...	...	...

B

ID	name	...
948483	John R. R. Tolkien	...
153494	C. S. Lewis	...
494392	Fordo Baggins	...
799294	Biblo Baggins	...
...	...	...

- Task: Created unified customer view!

The Join Approach

- Solution: Join customer tables on name attribute (Q1):

```
SELECT * FROM A,B
WHERE A.name = B.name
```

- Exact Join: Does not work!
- Similarity Join: Allow k errors...
  (1) Register UDF (User Defined Function) for the edit distance:

$$\mathrm{ed}(x, y)$$

  returns the union cost edit distance between the strings x and y.
  (2) Rewrite query Q1 as similarity join (Q2):

```
SELECT * FROM A,B
WHERE ed(A.name, B.name) <= k
```

Effectiveness and Efficiency of the Approximate Join

- Effectiveness: Join result for $k = 3$:

ID	name	ID	name
1023	Frodo Baggins	494392	Fordo Baggins
21	J. R. R. Tolkien	948483	John R. R. Tolkien
239	C.S. Lewis	153494	C. S. Lewis
863	Bilbo Baggins	799294	Biblo Baggins

  $\Rightarrow$ very good (100% correct)

- Efficiency: How does the DB evaluate the query?
  (1) compute $A \times B$
  (2) evaluate UDF on each tuple $t \in A \times B$
- Prohibitive runtime!

Using a Filter for Search Space Reduction

- Search space: $A \times B$ ($\Rightarrow |A| \cdot |B|$ edit distance computations)
- Filtering (Pruning): Remove tuples that can not match, without actually computing the distance.

Outline

1. Filters for the Edit Distance
   - Motivation
   - Lower Bound Filters
   - Length Filter
   - q-Grams: Count Filter
   - q-Grams: Position Filtering
   - Experiments
2. The q-Gram Distance
3. Conclusion

Filter Properties

- Error Types:

		Correct Result: positive	Correct Result: negative
Filter Test	positive	true positive	false positive
	negative	false negative	true negative

- Example: "Are x and y within edit distance k?"
  - *Correct result:* compute edit distance and test $\text{ed}(x, y) \leq k$
  - *Filter test:* give answer without computing edit distance
  - *False negatives:* x and y are pruned although $\text{ed}(x, y) \leq k$.
  - *False positives:* x and y are not pruned although $\text{ed}(x, y) \not\leq k$.
- Good filters have
  - no false negatives (i.e., miss no correct results)
  - few false positive (i.e., avoid unnecessary distance computations)

Lower Bound Filters

- Lower bound (lb) for distance $\text{dist}(x, y)$:

$$\text{dist}(x, y) \geq \text{lb}_{\text{dist}}(x, y)$$

- Query Q3 with Lower Bound Filter :

```
SELECT * FROM A,B
WHERE lb(A.name, B.name) <= k AND
      ed(A.name, B.name) <= k
```

- Requirements for the filter `lb(A.name, B.name)`:
  - much cheaper to compute than `ed(A.name, B.name)`
  - ideally supported by an index
- Database optimizes the query: `ed(A.name,B.name)` is computed only if `lb(A.name,B.name)` $\leq$ `k`
- No false negatives!

Outline

1. Filters for the Edit Distance
   - Motivation
   - Lower Bound Filters
   - Length Filter
   - q-Grams: Count Filter
   - q-Grams: Position Filtering
   - Experiments
2. The q-Gram Distance
3. Conclusion

Length Filtering

Theorem (Length Filtering [GIJ+01])

If two strings x and y are within edit distance k, their lengths cannot differ by more than k:

$$\text{ed}(x, y) \geq \text{abs}(|x| - |y|)$$

- Proof: At least $\text{abs}(|x| - |y|)$ inserts are needed to bring x and y to the same length. □
- Query Q4 with Length Filtering:

```
SELECT * FROM A,B
WHERE ABS(LENGTH(A.name)-LENGTH(B.name)) <= k AND
      ed(A.name, B.name) <= k
```

Example: Length Filtering

- Execute query without/with length filter ($k = 3$):

A

ID	name
1023	Frodo Baggins$_{13}$
21	J. R. R. Tolkien$_{16}$
239	C.S. Lewis$_{10}$
863	Bilbo Baggins$_{13}$

B

ID	name
948483	John R. R. Tolkien$_{18}$
153494	C. S. Lewis$_{11}$
494392	Fordo Baggins$_{13}$
799294	Biblo Baggins$_{13}$

- Without length filter: 16 edit distance computations
- With length filter ($k = 3$): 12 edit distance computations
  - `J. R. R. Tolkien` $\leftrightarrow$ `C. S. Lewis` is pruned
  - all pairs (..., `John R. R. Tolkien`) except (`J. R. R. Tolkien`, `John R. R. Tolkien`) are pruned

Outline

1. Filters for the Edit Distance
   - Motivation
   - Lower Bound Filters
   - Length Filter
   - q-Grams: Count Filter
   - q-Grams: Position Filtering
   - Experiments
2. The q-Gram Distance
3. Conclusion

What is a q-Gram?

- Intuition:
  - slide window of length q over string $x \in \Sigma^*$
  - characters covered by window form a q-gram
  - where window extends string: fill with dummy character # $\notin \Sigma$
- Example: $x =$ `Frodo`, $q = 3$

  extended: `##Frodo##`
  q-grams:
  ```
  ##F
  #Fr
  Fro
  rod
  odo
  do#
  o##
  ```
- q-Gram Profile G_x: bag of all q-grams of x
- Profile size: $|G_x| = |x| + q - 1$

Single Edit Operations and Changing q-Grams

- Intuition: Strings within small edit distance share many q-grams.
- How many q-grams ($q = 3$) change/remain?

x	$\lvert G_x \rvert$	y	$\lvert G_y \rvert$	$\lvert G_x \uplus G_y \rvert$
peter	7	meter	7	4
peter	7	peters	8	5
peter	7	peer	6	4

- $\text{ed}(x, y) = 1 \Rightarrow \lvert G_x \uplus G_y \rvert = \max(\lvert G_x \rvert, \lvert G_y \rvert) - q$

Multiple Edit Operations and Changing q-Grams

- $\text{ed}(x, y) = 1 \Rightarrow |G_x \uplus G_y| = \max(|G_x|, |G_y|) - q$
- What if $\text{ed}(x, y) = k > 1$?

x	$\lvert G_x \rvert$	y	$\lvert G_y \rvert$	$\lvert G_x \uplus G_y \rvert$
peter	7	meters	8	2
peter	7	petal	7	3

- Multiple edit operations may affect the same q-gram:

$$\texttt{peter} \rightarrow G_x = \{\texttt{\#\#p}, \texttt{\#pe}, \texttt{pet}, \texttt{ete}, \texttt{ter}, \texttt{er\#}, \texttt{r\#\#}\}$$
$$\texttt{petal} \rightarrow G_y = \{\texttt{\#\#p}, \texttt{\#pe}, \texttt{pet}, \texttt{eta}, \texttt{tal}, \texttt{al\#}, \texttt{l\#\#}\}$$

- Each edit operation affects at most q q-grams.

Count Filtering

Theorem (Count Filtering [GIJ+01])

Consider two strings x and y with the q-gram profiles G_x and G_y, respectively. If x and y are within edit distance k, then the cardinality of the q-gram profile intersection is at least

$$|G_x \uplus G_y| \geq \max(|G_x|, |G_y|) - kq$$

- Proof (by induction):
  - true for $k = 1$: $|G_x \uplus G_y| \geq \max(|G_x|, |G_y|) - q$
  - $k \to k + 1$: each additional edit operation changes at most q q-grams. □

Implementation of q-Grams

- Given: tables A and B with schema $(id, name)$
  - id is the key attribute
  - $name$ is string-valued
- Compute auxiliary tables QA and QB with schema $(id, qgram)$:
  - each tuple stores one q-gram
  - string x of attribute $name$ is represented by its $|x| + q - 1$ q-grams
  - $QA.id$ is the key value ($A.id$) of a tuple with $A.name = x$
  - $QA.qgram$ is one of the q-grams of x
- Example:

A

id	$name$
1023	Frodo Baggins
21	J. R. R. Tolkien
239	C.S. Lewis
863	Bilbo Baggins

QA

id	$qgram$
1023	##F
1023	#Fr
...	...
21	##J
21	#J.
...	...

Count Filtering Query

- Query Q5 with Count Filtering:

```
SELECT   A.id, B.id, A.name, B.name
FROM     A, QA, B, QB
WHERE    A.id = QA.id AND
         B.id = QB.id AND
         QA.qgram = QB.qgram AND
         ABS(LENGTH(A.name)-LENGTH(B.name)) <= k
GROUP BY A.id, B.id, A.name, B.name
HAVING   COUNT(*) >= LENGTH(A.name)-1-(k-1)*q AND
         COUNT(*) >= LENGTH(B.name)-1-(k-1)*q AND
         ed(A.name,B.name) <= k
```

Problem with Count Filtering Query

- Previous query Q5 works fine for $kq < \max(|G_x|, |G_y|)$.
- However: If $kq \geq \max(|G_x|, |G_y|)$, no q-grams may match even if $\text{ed}(x, y) <= k$.
- Example ($q = 3, k = 2$):
  `WHERE`-clause prunes x and y, although $\text{ed}(x, y) <= k$

  $x = \texttt{IBM}$ $\quad G_x = \{\texttt{\#\#I}, \texttt{\#IB}, \texttt{IBM}, \texttt{BM\#}, \texttt{M\#\#}\}$ $\quad |G_x| = 5$

  $y = \texttt{BMW}$ $\quad G_y = \{\texttt{\#\#B}, \texttt{\#BM}, \texttt{BMW}, \texttt{MW\#}, \texttt{W\#\#}\}$ $\quad |G_y| = 5$
- False negatives:
  - short strings with respect to edit distance (e.g., $|x| = 3, k = 3$)
  - even if within given edit distance, matches tend to be meaningless (e.g., `abc` and `xyz` are within edit distance $k = 3$)

Fixing Count Filtering Query

- Fix query to avoid false negatives [GIJ+03]:
  - Join pairs (x, y) with $kq \geq \max(|G_x|, |G_y|)$ using only length filter.
  - Union results with results of previous query Q5.
- Query Q6 without false negatives (extends previous query Q5):

```
...
UNION
SELECT A.id, B.id, A.name, B.name
FROM   A, B
WHERE  LENGTH(A.name)+q-1 <= k*q AND
       LENGTH(B.name)+q-1 <= k*q AND
       ABS(LENGTH(A.name) - LENGTH(B.name)) <= k AND
       ed(A.name,B.name) <= k
```

- Note: We omit this part in subsequent versions of the query since it remains unchanged.

Outline

1. Filters for the Edit Distance
   - Motivation
   - Lower Bound Filters
   - Length Filter
   - q-Grams: Count Filter
   - q-Grams: Position Filtering
   - Experiments
2. The q-Gram Distance
3. Conclusion

Positional q-Grams

- Enrich q-grams with position information:
  - extended string: prefix and suffix string x with $q-1$ characters `#`
  - slide window of length q over extended string x'
  - characters covered by window after shifting it i times form the q-gram at position $i+1$
- Example: $x =$ `Frodo`

  extended string: `##Frodo##`

  positional q-grams:
  (1,`##F`)
  (2,`#Fr`)
  (3,`Fro`)
  (4,`rod`)
  (5,`odo`)
  (6,`do#`)
  (7,`o##`)

- For an SQL query that creates a new table `QA(id, pos, qgram)` with positional q-grams for table A: see Appendix.

Corresponding q-Grams

- Corresponding q-gram:
  - Given: positional q-grams (i, g) of x
  - transform x to y applying edit operations
  - (i, g) "becomes" (j, g) in y
  - We define: (i, g) corresponds to (j, g)
- Example:
  - $x' =$ ##abaZabaabaaba##, $y' =$ ##abaabaabaabaaba##
  - edit distance is 1 (delete Z from x)
  - $(7, \texttt{aba})$ in x corresponds to $(6, \texttt{aba})$ in y
  - . . . but not to $(9, \texttt{aba})$

Position Filtering

Theorem (Position Filtering [GIJ+01])

If two strings x and y are within edit distance k, then a positional q-gram in one cannot correspond to a positional q-gram in the other that differs from it by more then k positions.

- Proof:
  - each increment (decrement) of a position requires an insert (delete);
  - a shift by k positions requires k inserts/deletes. □

Position Filtering

- Query Q7 with Count and Position Filtering:

```
SELECT   A.id, B.id, A.name, B.name
FROM     A, QA, B, QB
WHERE    A.id = QA.id AND
         B.id = QB.id AND
         QA.qgram = QB.qgram AND
         ABS(LENGTH(A.name)-LENGTH(B.name)) <= k AND
         ABS(QA.pos-QB.pos)<=k
GROUP BY A.id, B.id, A.name, B.name
HAVING   COUNT(*) >= LENGTH(A.name)-1-(k-1)*q AND
         COUNT(*) >= LENGTH(B.name)-1-(k-1)*q AND
         ed(A.name,B.name) <= k
```

Outline

1. Filters for the Edit Distance
   - Motivation
   - Lower Bound Filters
   - Length Filter
   - q-Grams: Count Filter
   - q-Grams: Position Filtering
   - Experiments
2. The q-Gram Distance
3. Conclusion

Experimental Data

- All experimental results taken from [GIJ+01]
- Three string data sets:
  - set1: 40K tuples, average length: 14 chars
  - set2: 30K tuples, average length: 38 chars
  - set3: 30K tuples, average length: 33 chars

String Length Distributions

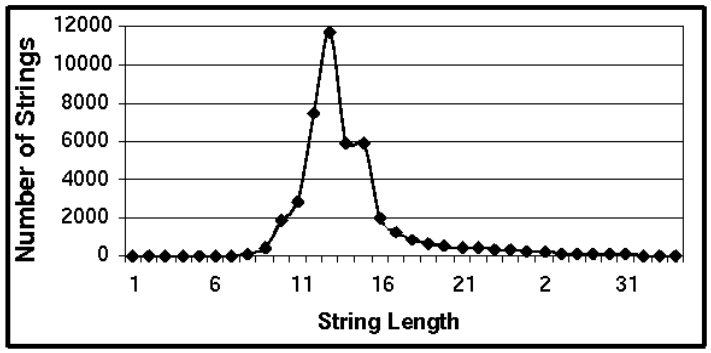

Set 1

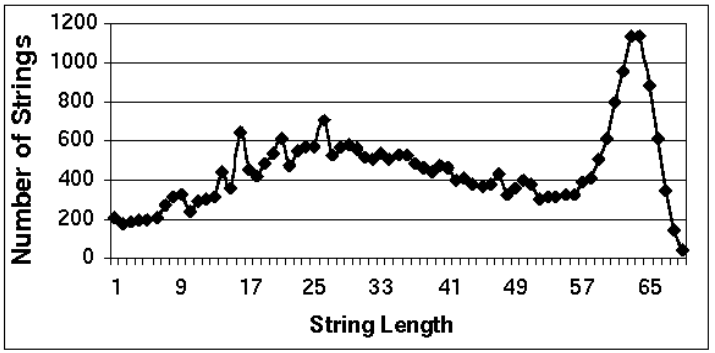

Set 2

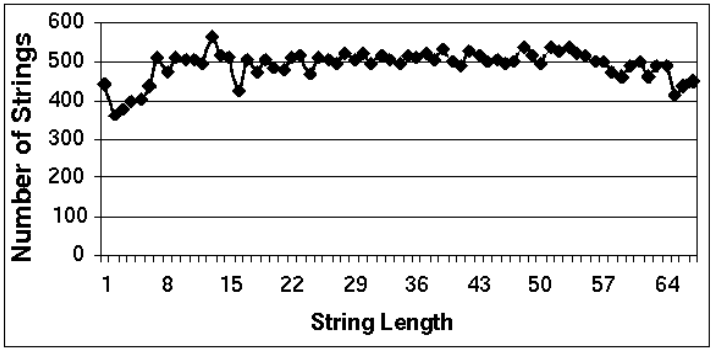

Set 3

Candidate Set Size

- Question: How many edit distances do we have to compute?
- Show candidate set size for different filters (small is good).
- $q = 2$
- Caption:
  - CP: cross product
  - L: length filtering, P: position filtering, C: count filtering
  - Real: number of real matches

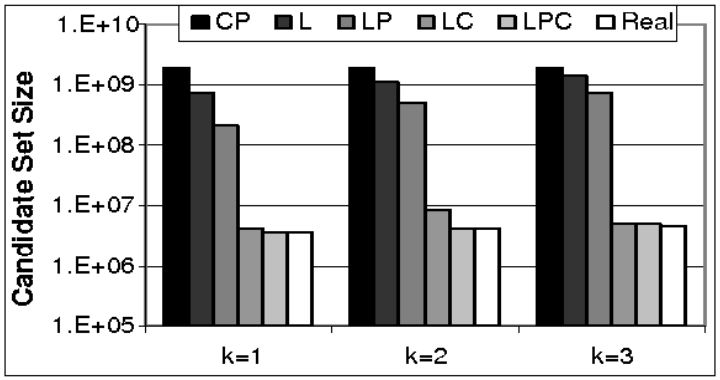

Set 1

Candidate Set Size

- Question: How many edit distances do we have to compute?
- Show candidate set size for different filters (small is good).
- $q = 2$
- Caption:
  - CP: cross product
  - L: length filtering, P: position filtering, C: count filtering
  - Real: number of real matches

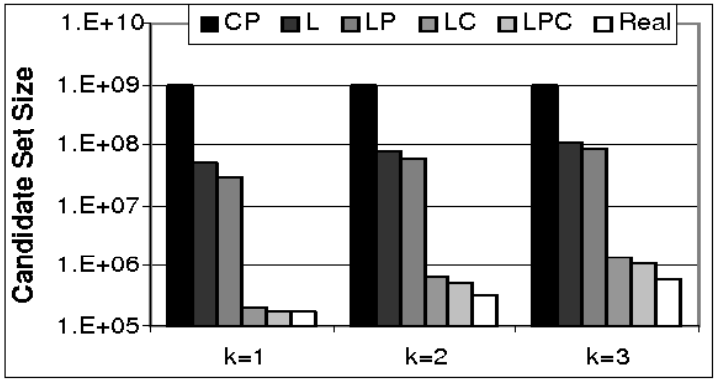

Set 2

Candidate Set Size

- Question: How many edit distances do we have to compute?
- Show candidate set size for different filters (small is good).
- $q = 2$
- Caption:
  - CP: cross product
  - L: length filtering, P: position filtering, C: count filtering
  - Real: number of real matches

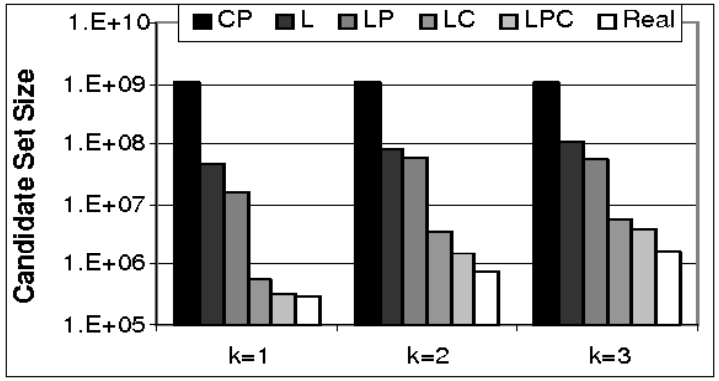

Set 3

Various q-Gram Lengths

- Question: How does the choice of q influence the filter effectiveness?
- Show candidate set size for different q values (small is good).

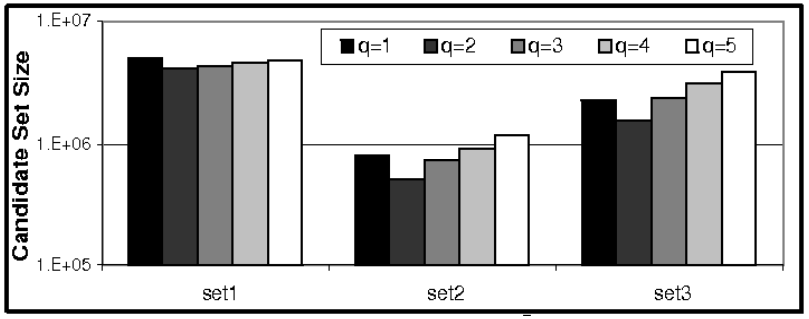

Edit Distance Threshold $k = 2$

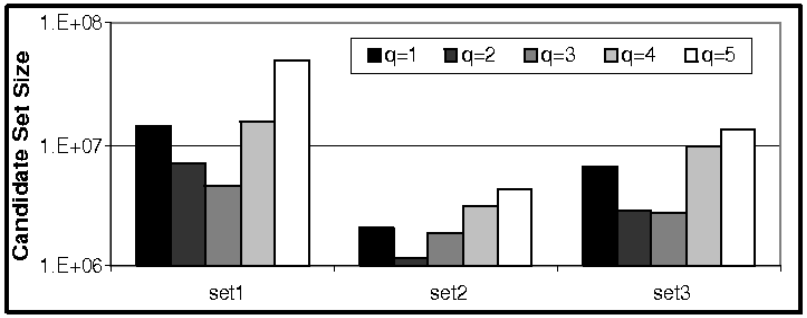

Edit Distance Threshold $k = 3$

Response Time

- Approximate self-join on small sample of 1000 tuples (set 1) (full dataset $>$ 3 days without filters!)
- Measure response time (small is good).
- Caption:
  - k: edit distance threshold
  - $Q1$: edit distance without filters
  - $Q2$: edit distance with filters

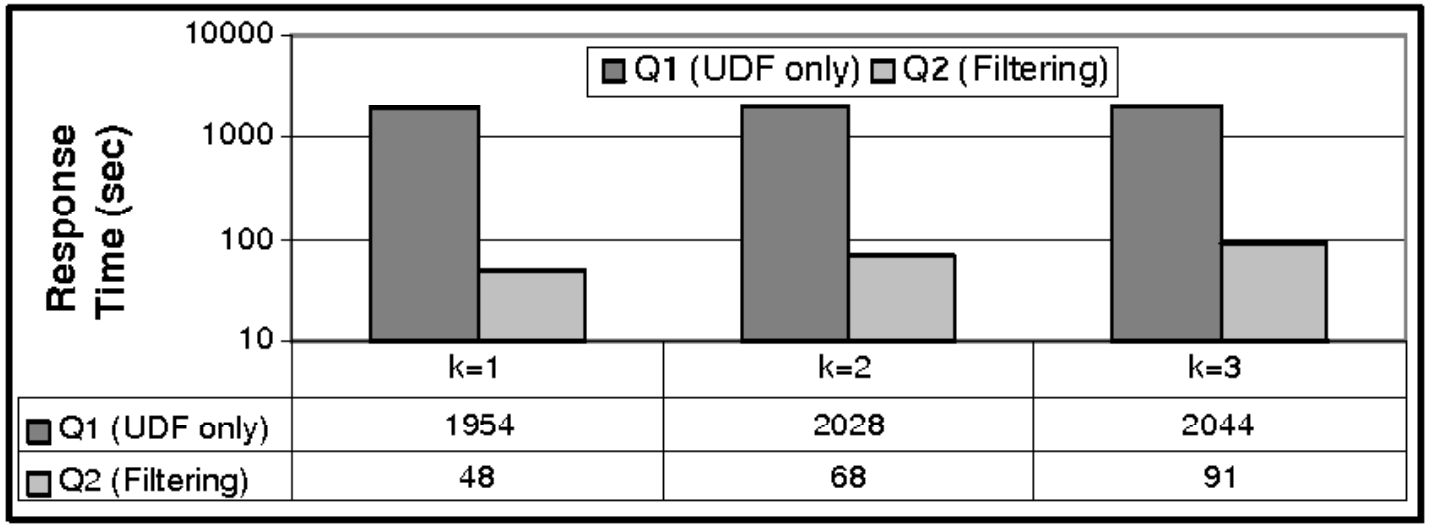

	k=1	k=2	k=3
Q1 (UDF only)	1954	2028	2044
Q2 (Filtering)	48	68	91

Outline

1. Filters for the Edit Distance
   - Motivation
   - Lower Bound Filters
   - Length Filter
   - q-Grams: Count Filter
   - q-Grams: Position Filtering
   - Experiments
2. The q-Gram Distance
3. Conclusion

The q-Gram Distance

Definition (q-Gram Distance [Ukk92])

Let G_x and G_y be the q-gram profiles of the strings x and y, respectively. The *q-gram distance* between two strings is the number of q-grams in G_x and G_y that have no match in the other profile,

$$\text{dist}_q(x, y) = |G_x \uplus G_y| - 2|G_x \pitchfork G_y|.$$

- Example: $q = 2, x = \texttt{abab}, y = \texttt{abcab}$

  $G_x = \{\texttt{\#a}, \texttt{ab}, \texttt{ba}, \texttt{ab}, \texttt{b\#}\}$
  $G_y = \{\texttt{\#a}, \texttt{ab}, \texttt{bc}, \texttt{ca}, \texttt{ab}, \texttt{b\#}\}$
  $G_x \uplus G_y = \{\texttt{\#a}, \texttt{ab}, \texttt{ba}, \texttt{ab}, \texttt{b\#}, \texttt{\#a}, \texttt{ab}, \texttt{bc}, \texttt{ca}, \texttt{ab}, \texttt{b\#}\}$
  $G_x \pitchfork G_y = \{\texttt{\#a}, \texttt{ab}, \texttt{ab}, \texttt{b\#}\}$
  $\text{dist}_q(x, y) = |G_x \uplus G_y| - 2|G_x \pitchfork G_y| = 11 - 2 \cdot 4 = 3$

Pseudo Metric q-Gram Distance

- The q-gram distance is a pseudo metric:
  For all $x, y, z \in \Sigma^*$
  - $\text{dist}_q(x, y) + \text{dist}_q(y, z) \geq \text{dist}_q(x, z)$ (triangle inequality)
  - $\text{dist}_q(x, y) = \text{dist}_q(y, x)$ (symmetric)
  - $\text{dist}_q(x, y) = 0 \Leftarrow x = y$
- Note: Identity condition relaxed: $\text{dist}_q(x, y) = 0 \not\Rightarrow x = y$
  i.e., the q-gram distance between two *different* strings can be 0
- Example:

  $\text{dist}_q(\texttt{axybxycxyd}, \texttt{axycxybxyd}) = 0$
  $G_x = G_y = \{\texttt{\#\#a}, \texttt{\#ax}, \texttt{axy}, \texttt{xyb}, \texttt{ybx}, \texttt{bxy}, \texttt{xyc}, \texttt{ycx}, \texttt{cxy}, \texttt{xyd}, \texttt{yd\#}, \texttt{d\#\#}\}$

Distance Normalization (1/3)

- What is a good threshold?

  $\mathrm{ed}(\texttt{International Business Machines Corporation},$
  $\quad \texttt{International Bussiness Machine_ Corporation}) = 2$
  $\mathrm{ed}(\texttt{IBM}, \texttt{BMW}) = 2$
  $\mathrm{ed}(\texttt{Int. Business Machines Corp.},$
  $\quad \texttt{International Business Machines Corporation}) = 17$

- Problem: Absolute numbers not always meaningful...
- Solution: Compute error relative to string length!

Distance Normalization (2/3)

- Normalize distance such that $\delta(x, y) \in [0..1]$
- Edit Distance:
  - non-normalized: $0 \leq \text{ed}(x, y) \leq \max(|x|, |y|)$
  - normalized edit distance: $0 \leq \text{norm-ed}(x, y) \leq 1$

$$\text{norm-ed}(x, y) = \frac{\text{ed}(x, y)}{\max(|x|, |y|)}$$

- q-Gram Distance:
  - non-normalized: $0 \leq \text{dist}_q(x, y) \leq |G_x \uplus G_y| - |G_x \uplus G_y|$
  - normalized[1] q-gram distance: $0 \leq \text{norm-dist}_q(x, y) \leq 1$

$$\text{norm-dist}_q(x, y) = \frac{\text{dist}_q(x, y)}{|G_x \uplus G_y| - |G_x \uplus G_y|} = 1 - \frac{|G_x \uplus G_y|}{|G_x \uplus G_y| - |G_x \uplus G_y|}$$

[1] Jaccard normalization. Dividing by $|G_x \uplus G_y|$ (Dice normalizaion) also normalizes to [0..1], but the metric properties (triangle inequality) get lost [ABG10].

Distance Normalization (3/3)

- Normalized edit distance:

  norm-ed(International Business Machines Corporation,
  International Bussiness Machine_ Corporation) = 0.047
  norm-ed(IBM, BMW) = 0.66
  norm-ed(Int. Business Machines Corp.,
  International Business Machines Corporation) = 0.4

- Normalized q-gram distance ($q = 3$):

  norm-dist$_q$(International Business Machines Corporation,
  International Bussiness Machine_ Corporation) = 0.089
  norm-dist$_q$(IBM, BMW) = 1.0
  norm-dist$_q$(Int. Business Machines Corp.,
  International Business Machines Corporation) = 0.36

Edit Distance vs. q-Gram Distance

- Edit distance can not handle block-moves well:

  $x =$ `Nikolaus Augsten` $\quad y =$ `Augsten Nikolaus`

  norm-ed$(x, y) = 1.0$

  norm-dist$_q(x, y) = 0.39 \quad (q = 3)$

- q-Gram distance may be too strict:

  $x =$ `+39-06-46-74-22` $\quad y =$ `(39 06 467422)`

  norm-ed$(x, y) = 0.4$

  norm-dist$_q(x, y) = 1.0 \quad (q = 3)$

Outline

1. Filters for the Edit Distance
   - Motivation
   - Lower Bound Filters
   - Length Filter
   - q-Grams: Count Filter
   - q-Grams: Position Filtering
   - Experiments
2. The q-Gram Distance
3. Conclusion

Summary

- Approximate join with edit distance inefficient.
- Edit distance filters speed up join:
  - Length filter: based on the string length
  - Count filter: based on q-Grams
  - Position filter: based on positional q-Grams

Computing Positional q-Grams in SQL

- Given: table N
  - N has a single attribute i
  - N is filled with numbers from 1 to max
    (max is the maximum string length plus $q-1$)
- Positional q-grams for table A in SQL (Q8):

```
CREATE TABLE QA AS
        SELECT A.id, N.i AS pos,
            SUBSTRING(CONCAT(
                SUBSTRING('#..#', 1, q - 1),
                LOWER(A.name),
                SUBSTRING('#..#', 1, q - 1)),
            N.i, q) AS qgram
        FROM A, N
        WHERE N.i <= LENGTH(A.name) + q - 1
```

Nikolaus Augsten, Michael Böhlen, and Johann Gamper.
The *pq*-gram distance between ordered labeled trees.
ACM Transactions on Database Systems (TODS), 35(1):1–36, 2010.

Luis Gravano, Panagiotis G. Ipeirotis, H. V. Jagadish, Nick Koudas, S. Muthukrishnan, and Divesh Srivastava.
Approximate string joins in a database (almost) for free.
In *Proceedings of the International Conference on Very Large Databases (VLDB)*, pages 491–500, Roma, Italy, September 2001. Morgan Kaufmann Publishers Inc.

Luis Gravano, Panagiotis G. Ipeirotis, H. V. Jagadish, Nick Koudas, S. Muthukrishnan, and Divesh Srivastava.
Approximate string joins in a database (almost) for free — Erratum.
Technical Report CUCS-011-03, Department of Computer Science, Columbia University, 2003.

Esko Ukkonen.
Approximate string-matching with *q*-grams and maximal matches.

Theoretical Computer Science, 92(1):191–211, January 1992.